


GENERAL TECHNICAL CHARACTERISTICS 技术特性

Reference standards 参考标准	IEC60110
Dielectric 介质材料	Polypropylene film / aluminum foil
Insulation oil 绝缘油	PEPE or C101 for high frequency capacitors; Rapeseed oil for DC capacitors (Non-PCB, Environmentally friendly, non-toxic biodegradable)
Case 外壳材料	Aluminum case. Side board 2mm, Cover and Base 3mm. Live or Dead case on request
Leads 引出端	Porcelain copper screw and cooling pipe
Mounting position 安装位置	Vertically or Horizontal with proper support for the weight of the capacitor

ELECTRICAL CHARACTERISTICS 电气特性

Ambient temperature 环境温度范围	- 20°C to + 50°C
Rated voltage range 额定电压	up to 6000 V
Capacitance range 容量范围	up to 6000μF
Power range 功率范围	up to 13400Kvar
Frequency range 频率范围	up to 50,000Hz
Capacitance tolerance 容量偏差	± 5%, ± 10%
Over-voltage 过电压	Rated voltage x 1.05 (12h per day)
Over-current 过电流	Rated current x 1.15
Cooling methods 冷却方法	Water cooling
Water flow rate 水流量	6L/min
Max. inlet water temperature	30°C
Max. outlet water temperature	45°C
Pressure switch (on request)	Normal close (NC) type
Discharge device (on request)	Less than 75V in 3 min.
Location 安装位置	Indoor use, no more than 1000m altitude

OUTLINE DRAWING 外形图

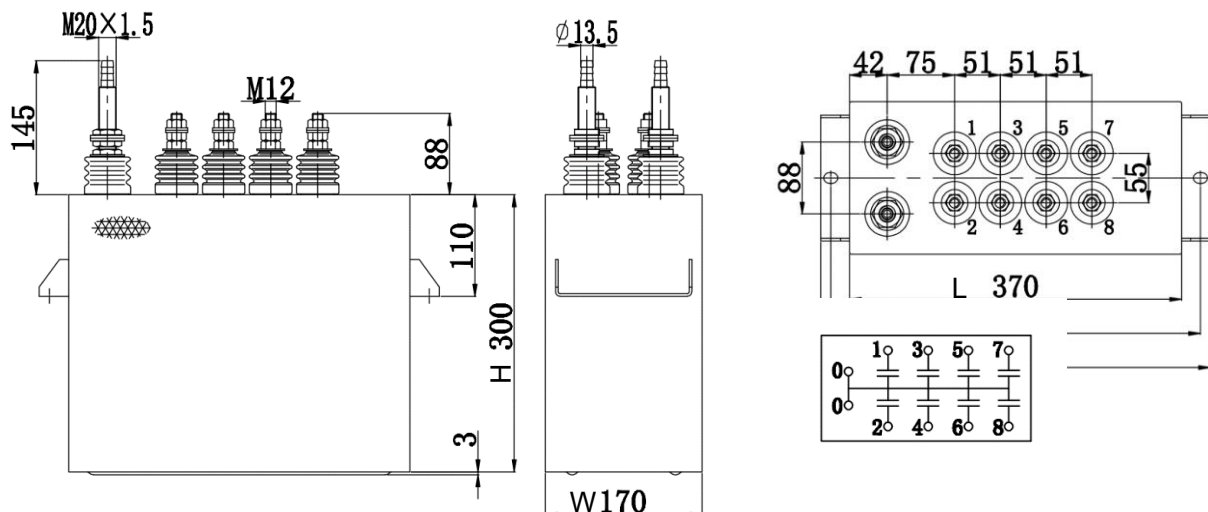

Line terminal	1	2	3	4	5	6	7	8			Total
Rated output (kvar)	356.3	356.3	356.3	356.3	356.3	356.3	356.3	356.3			2850
Rated capacitance (μF)	8.4	8.4	8.4	8.4	8.4	8.4	8.4	8.4			67.2
Rated voltage (V)	1500		Rated frequency (Hz)		3000		Rated current (A)		1900		

HOW TO ORDER:

<u>KOW</u>	<u>460</u>	<u>/</u>	<u>75</u>	<u>/</u>	<u>0.06</u>	<u>/</u>	<u>2</u>	<u>***</u>
Series Code:	Voltage:		Total output		Frequency f:		Splits:	Internal
KOW:	460: 460V		(kvar):		(kHz)		1 ,2, 3, 4, 5,	Code
AGW Series	1000: 1000V		75: 75Kvar		0.06: 60Hz,		6, 7, 8	
					3: 3.000Hz			

ELECTRICAL SPECIFICATION 规格型号参考

Part Number	U _N V	Q _N Kvar	f _N Hz	Splits	C _N μF	Case Size (inch)		
						W	L	H
KOW151/35.3/10/1	150	35.3	10000	1	25	5	6	6.62
KOW221/230/9.6/6	220	230	9600	6	78.8	4.12	13.5	7
KOW400/300/3/4	400	300	3000	4	99.5	4.12	13.5	7
KOW400/450/3/6	400	450	3000	6	149.2	4.12	13.5	13
KOW400/600/3/5	400	600	3000	5	198.9	4.12	13.5	12.5
KOW400/900/3/5	400	900	3000	8	298.4	4.12	13.5	13
KOW400/300/9.6/6	440	300	9600	6	25.7	4.12	13.5	7
KOW440/450/9.6/6	440	450	9600	6	38.5	4.12	13.5	7
KOW440/900/9.6/8	440	900	9600	8	77.1	4.12	13.5	9
KOW460/75/0.06/2	460	75	60	2	940.2	3.88	13.5	10.75
KOW460/100/0.06/2	460	100	60	2	1253.6	4.88	13.5	10.75
KOW500/545/3/6	500	545	3000	6	115.7	4.12	13.5	13
KOW500/800/3/6	500	800	3000	6	169.8	5.12	13.5	13
KOW550/235/0.18/6	550	235	180	6	686.9	6.25	13.5	21
KOW550/418/4/8	550	418	4000	8	55	4.12	13.5	7
KOW550/420/0.54/6	550	420	540	6	409.2	6.25	13.5	11
KOW600/100/0.06/2	600	100	60	2	736.8	3.88	13.5	21.75
KOW600/286/0.18/6	600	286	180	6	702.4	6.25	13.5	14
KOW600/990/25/7	600	990	25000	7	17.5	5.12	13.5	15.25
KOW600/1100/1.5/8	600	1100	1500	8	324.2	6.25	13.5	12
KOW600/110/25/7	600	1110	25000	7	19.6	5.12	13.5	13
KOW600/1130/0.5/8	600	1130	500	8	1000	6.25	13.5	18.5
KOW600/1150/10/8	600	1150	10000	8	50.8	4.12	13.5	7
KOW600/1152/3/8	600	1152	3000	8	169.8	6.52	13.5	7
KOW600/1280/0.3/8	600	1280	300	8	1886	8	22	24.8
KOW600/1350/0.3/8	600	1350	300	8	1990	8	22	25.6
KOW600/1368/0.3/1	600	1388	300	1	2045.4	7.5	22	31
KOW600/1900/0.3/1	600	1900	300	1	2800	8	22	34.3
KOW625/1060/3/8	625	1060	3000	8	144	5	13.5	13.5
KOW625/1154/0.5/8	625	1154	500	8	94	5.12	13.5	9
KOW660/1280/0.3/8	660	1280	300	8	1559	8	22	24.6
KOW660/1500/0.3/1	660	1500	300	1	1827	8	22	28
KOW700/1458/0.18/1	700	1458	180	1	2630	8	22	31
KOW700/1518/0.2/1	700	1518	200	1	2465	8	22	28
KOW700/1539/0.5/8	700	1539	500	8	1000	6.25	13.5	19
KOW700/1680/0.5/1	700	1680	500	1	1091.3	6.25	13.5	24.5
KOW700/1680/4/8	700	1680	4000	8	136.4	6.12	13.5	9
KOW750/300/0.18/4	750	300	180	4	471.6	6.25	13.5	17
KOW750/400/0.18/6	750	400	180	6	628.8	6.25	13.5	19
KOW750/560/0.24/1	750	560	240	1	660.2	6.25	13.5	19.5
KOW750/1180/50/6	750	1180	50000	6	6.7	5.12	13.5	9
KOW750/1375/3/1	750	1375	3000	1	129.7	6.12	13.5	7
KOW800/62.5/1/4	800	62.5	1000	4	200	4.12	13.5	15.25
KOW800/300/9.6/5	800	300	9600	5	7.8	4.12	13.5	7

Remark: 1. *** Internal code.

2. Customization for special specification and requirement is available.

ELECTRICAL SPECIFICATION 规格型号参考

Part Number	U _N V	Q _N Kvar	f _N Hz	Splits	C _N μF	Case Size (inch)		
						W	L	H
KOW800/440/0.15/6	800	440	150	6	729.5	6.25	13.5	21.5
KOW800/450/0.96/5	800	450	960	5	116.6	5.12	13.5	13
KOW800/450/0.96/6	800	450	960	6	117	4.12	13.5	13
KOW800/450/25/5	800	450	25000	5	4.5	4.12	13.5	7
KOW800/700/0.2/6	800	700	200	6	870.4	6.25	13.5	25.5
KOW800/905/4/6	800	805	4000	6	50.1	4.12	13.5	7.5
KOW800/900/3/4	800	900	3000	4	74.6	4.12	13.5	13
KOW800/955/50/6	800	955	50000	6	4.7	6.12	15.5	15
KOW800/1000/0.2/6	800	1000	200	6	1243.4	6.25	13.5	28
KOW800/1000/3/4	800	1000	3000	4	82.9	4.12	13.5	13
KOW800/1000/8/8	800	1000	8000	8	31.1	4.13	13.5	7
KOW800/1140/5/6	800	1140	5000	6	11.3	5.12	13.5	9.5
KOW800/1200/0.4/1	800	1200	400	1	1131	6.5	13.5	28
KOW800/1200/3/8	800	1200	3000	8	99.5	5.12	13.5	13
KOW800/1414/10/8	800	1412	10000	8	35.1	4.12	13.5	13
KOW800/1050/25/6	800	1050	25000	6	10	4.12	13.5	7
KOW800/1500/10/8	800	1500	10000	8	37.3	4.12	13.5	13
KOW800/1750/0.25/1	800	1750	250	1	1740	8	22	28
KOW800/1900/1/1	800	1900	1000	1	472.5	6.25	13.5	17.5
KOW800/1900/3/8	800	1900	3000	8	158	6.25	13.5	13
KOW800/1918/0.6/1	800	1918	600	1	795	6.5	13.5	28
KOW800/1920/10/8	800	1920	10000	8	47.7	5.12	13.5	13
KOW850/12/0.06/4	850	128	60	4	469.9	6.25	13.5	15
KOW900/733/1/4	900	733	1000	4	144	5.12	13.5	13.5
KOW900/900/3/4	900	900	3000	4	58.92	4.33	13.5	11
KOW900/1000/0.9/1	900	1000	900	1	218.3	6.25	13.5	9
KOW900/1500/1/6	900	1500	1000	6	295	6.25	13.5	18
KOW900/2000/2/8	900	2000	2000	8	196	6.25	13.5	14
KOW900/2000/3/7	900	2000	3000	17	131	5.5	13.5	15.7
KOW900/2443/1/1	900	2443	1000	1/	480	6.25	13.5	14.5
KOW940/800/2.7/4	940	800	2700	4	53.4	4.12	13.5	7
KOW1000/250/50/6	1000	250	50000	6	0.8	5.12	13.5	7
KOW1000/600/0.54/6	1000	600	540	6	176.8	6.25	13.5	11.5
KOW1000/694/0.3/6	1000	694	300	6	368.2	6.25	13.5	15
KOW1000/780/0.7/6	1000	780	700	6	177	5.5	13.5	13.8
KOW1000/807/0.15/6	1000	807	150	6	856.3	6.25	13.5	28
KOW1000/792/0.7/6	1000	792	700	6	180	5.3	13.5	14.2
KOW1000/880/3/6	1000	880	3000	6	46.7	4.12	13.5	7
KOW1000/900/1.2/8	1000	900	1200	8	119.4	4.62	13.5	13
KOW1000/1000/0.3/6	1000	1000	300	6	530.5	6.25	13.5	24
KOW1000/1169/1/8	1000	1169	1000	8	18	5.5	19.7	17.7
KOW1000/1112/10/6	1000	1112	10000	6	17.7	4.13	13.5	7
KOW1000/1200/3/6	1000	1200	3000	6	63.7	4.12	13.5	13
KOW1000/1200/9.6/8	1000	1200	9600	8	19.9	4.12	13.5	13
KOW1000/1500/0.5/1	1000	1500	500	1	477.5	6.25	13.5	18
KOW1000/1185/1/1	1000	1885	1000	1	300	5.7	15.7	28.3
KOW1000/2000/0.5/1	1000	2000	500	1	637	7.5	22	13
KOW1000/2084/0.2/1	1000	2084	200	1	1658	8.00	22	28
KOW1000/2470/0.6/1	1000	2470	600	1	655	7.5	16.5	28
KOW1000/2470/1/1	1000	2470	1000	1	393	6.25	13.5	23.3
KOW1000/2470/3/1	1000	2470	3000	1	131	6.06	13.5	12.1
KOW1000/2500/3/8	1000	2500	3000	8	132.6	4.12	13.5	13
KOW1000/4800/1.2/2	1000	4800	1200	2	637	8	22	28
KOW1100/400/3/4	1100	400	3000	4	17.5	4.12	13.5	7

Remark: 1 *** Internal code.

2. Customization for special specification and requirement is available.

ELECTRICAL SPECIFICATION 规格型号参考

Part Number	U _N V	Q _N Kvar	f _N Hz	Splits	C _N μF	Case Size (inch)		
						W	L	H
KOW1100/1000/0.3/6	1100	1000	300	6	438.4	6.25	13.5	19
KOW1100/1210/0.5/5	1100	1210	500	5	318.3	6.25	11.5	14.25
KOW1100/1650/0.3/6	1100	1650	300	6	723.4	6.25	13.5	28
KOW1100/1650/3/6	1100	1650	3000	6	72.3	4.12	13.5	13
KOW1100/1815/0.5/6	1100	1815	500	6	477.5	6.25	13.5	22
KOW1100/2200/1/1	1100	2200	1000	1	289.4	6	13.5	13.75
KOW1100/2514/2/8	1100	2514	2000	8	165.3	5.12	13.5	13
KOW1200/120/0.06/1	1200	120	60	1	221	4.65	13.5	17.5
KOW1200/120/0.06/3	1200	120	60	3	221	4.12	13.5	17.5
KOW1200/200/0.06/2	1200	200	60	2	368.4	4.5	13.5	22
KOW1200/600/0.18/6	1200	600	180	6	368.4	6.25	13.5	17.5
KOW1200/1200/10/6	1200	1200	10000	6	13.3	4.12	13.5	7
KOW1200/1900/2/6	1200	1900	2000	6	105	4.12	13.5	13
KOW1200/2880/1/8	1200	2880	1000	8	318.3	6.25	13.5	20.4
KOW1250/750/1/6	1250	750	1000	6	76.4	4.12	13.5	13
KOW1250/965/0.1/1	1250	965	100	1	985	8	13.5	28
KOW1250/1200/3/8	1250	1200	3000	8	40.7	4.12	13.5	9
KOW1250/1000/0.6/6	1250	1000	600	6	169	6.25	13.5	12.5
KOW1250/1200/25/6	1250	1200	25000	6	4.9	6.12	13.5	14.25
KOW1250/1235/50/6	1250	1235	50000	6	2.5	6.13	13.5	14.25
KOW1250/2000/0.5/8	1250	2000	500	8	407.4	6.25	13.5	23
KOW1250/2000/1.2/6	1250	2000	1200	6	169.8	5.25	13.5	15.25
KOW1250/2253/1/8	1250	2253	1000	8	229.5	6.12	13.5	15.25
KOW1250/2500/15/7	1250	2500	15000	7	17	5.12	13.5	15.25
KOW1250/2600/3/8	1250	2600	3000	8	88.3	6.12	13.5	13
KOW1250/2600/10/8	1250	2600	10000	8	26.5	4.12	13.5	13
KOW1250/2900/0.3/1	1250	2900	300	1	985	8	13.5	28
KOW1250/3000/0.3/1	1250	3000	300	1	1019	6.25	13.5	28
KOW1250/3000/0.6/8	1250	3000	600	8	509.3	6.25	13.5	28
KOW1250/3000/1/8	1250	3000	1000	8	305.6	6.25	13.5	20
KOW1250/3000/1/1	1250	3000	1000	1	305.6	6.25	13.5	15.5
KOW1250/3000/3/8	1250	3000	3000	8	101.9	5.12	13.5	13.5
KOW1250/3000/10/8	1250	3000	10000	8	30.6	5.25	13.5	13
KOW1250/3000/10/8	1250	3000	10000	8	30.6	4.12	13.5	15.25
KOW1250/4200/0.5/2	1250	4200	500	2	856	8	22	28
KOW1300/2800/0.6/1	1300	2800	600	1	439.5	6.5	13.5	24.2
KOW1350/3000/1/1	1350	3000	1000	1	262	6.25	13.5	15
KOW1450/200/0.06/2	1450	200	60	2	252.4	4.75	13.5	22.5
KOW1500/1200/0.7/1	1500	1200	700	1	121.3	6.25	13.5	12
KOW1500/1270/0.3/1	1500	1270	300	1	850	6.25	13.5	26
KOW1500/1815/0.3/6	1500	1815	300	6	428	6.25	13.5	28
KOW1500/1815/0.5/6	1500	1815	500	6	256.8	6.25	13.5	19
KOW1500/2333/3/8	1500	2333	3000	8	55	4.12	13.5	13
KOW1500/2700/0.6/6	1500	2700	600	6	318.3	6.25	13.5	24
KOW1500/7200/1.2/2/	1500	7200	1200	2	424.4	6.25	22	21.5
KOW1600/3400/0.61	1600	3400	600	1	352.3	6.25	13.5	28
KOW1600/3400/1/1	1600	3400	1000	1	211.4	6.25	13.5	20
KOW1650257/1.2/1	1650	257	1200	1	12.52	6.54	13.5	8.66
KOW1800/985/0.2/1	1800	985	200	1	241.9	6.25	13.5	26
KOW1800/1200/1.2/6	1800	1200	1200	6	49.1	5.12	13.5	13
KOW1800/1900/0.3/6	1800	1900	300	6	311.1	6.25	13.5	28
KOW1800/1900/0.3/1	1800	1900	300	1	311.1	6.25	13.5	28
KOW1800/2900/1.2/8	1800	2900	1200	8	118.7	6.12	13.5	15.25

Remark: 1. *** Internal code.

2. Customization for special specification and requirement is available.

ELECTRICAL SPECIFICATION 规格型号参考

Part Number	U _N V	Q _N Kvar	f _N Hz	Splits	C _N μF	Case Size (inch)		
						W	L	H
KOW1800/3000/15/7	1800	3000	15000	7	9.8	5.12	13.5	15.25
KOW1800/3000/35/7	1800	3000	35000	7	4.2	5.12	13.5	15.25
KOW1800/3350/0.6/1	1800	3350	600	1	274	6.25	13.5	29
KOW1800/3600/3/8	1800	3600	3000	8	59	5.13	13.5	13
KOW1800/4000/0.3/1	1800	4000	300	1	650	7.5	22	28
KOW1800/4100/0.3/1	1800	4100	300	1	671	6.25	22	31
KOW1800/4320/1.2/1	1800	4320	1200	1	177	6	22	13.5
KOW1800/5525/1/1	1800	5525	1000	1	271	6.89	22	17.2
KOW1800/6000/0.3/1	1800	6000	300	1	982	8	22	33.5
KOW1850/3300/1/1	1850	3300	1000	1	153	6.25	13.5	18.5
KOW1875/7500/0.5/1	1875	7500	500	1	679	8	22	28
KOW2000/2200/1/6	2000	2200	1000	6	87.5	6.25	13.5	20
KOW2000/2700/0.5/6	2000	2700	500	6	214.9	6.25	13.5	28
KOW2000/3000/0.55/1	2000	3000	550	1	217	6.25	13.5	26
KOW2000/3000/3/8	2000	3000	3000	8	39.8	5.12	13.5	13
KOW2000/3016/20/7	2000	3016	20000	7	6	5.13	13.5	14
KOW2000/3016/30/7	2000	3016	30000	7	4	5.12	13.5	15.25
KOW2000/3214/0.25/1	2000	3214	250	1	511.5	8	22	28
KOW2000/4000/0.3/1	2000	4000	300	1	531	7.5	22	28
KOW2000/1815/0.3/1	2000	1815	300	1	198.9	6.25	13.5	26
/KOW2200/1815/1/1	2200	1815	1000	1	59.7	6	13.5	11
KOW2200/2600/40/7	2200	2600	40000	7	2.1	5.12	13.5	15.25
KOW2200/3960/3/6	2200	3960	3000	6	43.4	5.12	13.5	15.25
KOW2200/5280/1.5/1	2200	5280	1500	1	115.7	6.25	13.5	24.5
KOW2400/120/0.06/2	2400	120	60	2	55.3	4.12	13.5	17.5
KOW2400/1815/0.2/6	2400	1815	200	6	207.2	6.25	13.5	28
KOW2400/1815/0.5/1	2400	1815	500	1	100.3	6.25	13.5	17
KOW2400/2500/0.5/4	2400	2500	500	4	100.3	6.25	13.5	20.5
KOW2400/4300/0.4/1	2400	4300	400	1	172.7	6.25	13.5	28
KOW2400/4300/0.3/1	2400	4300	300	1	396	8	22	32
KOW2500/1000/20/6	2500	1000	200000	6	0.13	4.5	13.5	5
KOW2500/1800/0.7/6	2500	1800	700	6	261.9	6	13.5	17.5
KOW2500/2000/0.5/6	2500	2000	500	6	101.9	6.25	13.5	28
KOW2500/3000/0.5/1	2500	3000	500	1	152.8	6.25	13.5	28
KOW2500/4780/0.5/1	2500	4780	500	1	244	7.5	22	28
KOW2500/6000/1.5/1	2500	6000	1500	1	101.9	6.25	13.5	28
KOW2500/8000/0.5/1	2500	8000	500	1	407	8	22	30.5
KOW2500/9817/2.5/1	2500	9817	2500	1	100	8	6.9	22.6
KOW2700/4000/0.4/1	2700	4000	400	1	218	6.25	22	19.7
KOW2800/4000/0.3/1	2800	4000	300	1	271	8	22	28
KOW2800/4000/0.4/1	2800	4000	400	1	203	6.25	22	21.3
KOW2800/4800/0.4/1	2800	4800	400	1	244	7.5	22	8
KOW2800/7310/0.7/1	2800	7310	700	1	212	6.25	22	28
KOW2800/8000/0.35/1	2800	8000	350	1	464	8.15	22	33.5
KOW2860/5525/0.25/1	2860	5525	250	1	430	8	22	31
KOW2860/6630/0.3/1	2860	6630	300	1	430	8	22	31
KOW3000/1500/0.6/6	3000	1500	600	6	4.4	4.12	13.5	13
KOW3000/1800/1/6	3000	1800	1000	6	3.8	6.12	13.5	15.25
KOW3000/2000/0.7/1	3000	2000	700	1	50.5	6.25	13.5	14
KOW3000/2000/50/3	3000	2000	50000	3	0.7	6.12	13.5	13
KOW3000/3000/20/7	3000	3000	20000	7	2.7	5.12	13.5	15.25
KOW3000/3150/50/6	3000	3150	50000	6	1.1	6.25	13.5	14
KOW3000/3393/0.4/1	3000	3393	400	1	150	5.7	16.5	33.5

Remark: 1. *** Internal code.

2. Customization for special specification and requirement is available.

■ ELECTRICAL SPECIFICATION 规格型号参考

Part Number	U _N V	Q _N Kvar	f _N Hz	Splits	C _N μF	Case Size (inch)		
						W	L	H
KOW3000/3167/0.7/1	3000	3167	700	1	80	8.46	13.5	25.6
KOW3000/3500/10/3	3000	3500	10000	3	6.2	6.12	13.5	15.75
KOW3000/3900/6/8	3000	3900	6000	8	11.5	4.12	13.5	15.25
KOW3000/4750/1.2/7	3000	4750	1200	7	70	5.5	15.7	27.5
KOW3000/4800/0.4/2	3000	4800	400	2	212.2	7.5	22	28
KOW3000/5133/0.3/1	3000	5133	300	1	303	7.5	22	28
KOW3000/5173/0.3/1	3000	5173	300	1	305	7.5	22	28
KOW3000/5350/0.3/1	3000	5350	300	1	315.4	8	22	31
KOW3000/5400/0.45/1	3000	5400	450	1	212.2	8	22	28
KOW3000/5450/0.7/1	3000	5450	700	1	137.7	6.5	16.5	28
KOW3000/5655/1/1	3000	5655	1000	1	100	6.25	13.5	28
KOW3000/5796/0.6/1	3000	5796	600	1	170	8.26	16.5	26.8
KOW3000/5900/0.5/2	3000	5900	500	2	209	7.5	22	24
KOW3000/6000/1/1	3000	6000	1000	1	106	6.25	22	17.7
KOW3000/6000/0.5/2	3000	6000	500	2	212	8	22	23.2
KOW3000/6000/0.4/1	3000	6000	400	1	265	7.5	22	28
KOW3000/6000/0.3/1	3000	6000	300	1	354	7.5	22	31
KOW3000/6667/1.2/1	3000	6667	1200	1	98.2	6.25	13.5	28
KOW3000/6921/1.2/1	3000	6921	1200	1	102	6.25	13.5	28
KOW3000/7200/0.6/1	3000	7200	600	1	255	7.5	22	31
KOW3000/8400/0.7/1	3000	8400	700	1	212	7.5	22	28
KOW3000/13400/1.2/1	3000	13400	1200	1	197.5	8	22	31
KOW3050/7500/0.7/1	3050	7500	700	1	183.3	6.89	22	28
KOW3050/8682/0.7/2	3050	8682	700	2	212	7.5	22	28
KOW3200/5500/0.7/1	3200	5500	700	1	122	6.89	22	20.8
KOW3200/6000/0.3/1	3200	6000	300	1	311	7.5	22	31
KOW3200/6000/0.4/1	3200	6000	400	1	233	7.5	22	28
KOW3200/6000/0.5/1	3200	6000	500	1	187	8	22	23.2
KOW3200/6000/1/1	3200	6000	1000	1	93.2	6.89	22	16.3
KOW3200/6826/0.7/1	3200	6826	700	1	151.5	6.89	22	23.6
KOW3200/8000/0.5/1	3200	8000	500	1	249	8	22	30.7
KOW3300/513/0.6/1	3300	513	600	1	12.5	6.53	13.5	8.66
KOW3300/1815/1/1	3300	1815	1000	1	26.5	6.25	13.5	11
KOW3300/3025/0.5/1	3300	3025	500	1	88.4	6.5	13.5	228
KOW3300/3300/0.3/1	3300	3300	300	1	160.8	7.5	22	28
KOW3300/3300/1/6	3300	3300	1000	6	48.2	6.25	13.5	25
KOW3300/5000/0.3/1	3300	5000	300	1	244	7.5	22	28
KOW3300/5450/0.5/1	3300	5450	500	1	159	8	22	21.8
KOW3300/5455/0.6/1	3300	5455	600	1	133	7.5	22	24.7
KOW3300/6000/0.5/1	3300	6000	500	1	175	8	22	23.2
KOW3300/6160/0.5/1	3300	6160	500	1	180.1	8	22	28
KOW3300/7350/1.5/1	3300	7350	1500	1	71.6	6.25	13.5	28
KOW3500/5000/0.3/1	3500	5000	300	1	216.5	7.5	22	28
KOW3500/6000/0.3/1	3500	6000	300	1	260	7.5	22	31
KOW3500/6000/1/1	3500	6000	1000	1	80	6.89	22	17.7
KOW3500/8000/0.3/1	3500	8000	300	1	346	9.17	22	35.4
KOW3800/7500/0.5/1	3800	7500	500	1	165	8	22	28
KOW4000/6333/0.6/1	4000	6333	600	1	105	8	22	28
KOW4000/8333/0.5/1	4000	8333	500	1	166	8	22	28
KOW4400/7760/0.6/1	4400	7760	600	1	99.5	7.5	22	34.6
KOW4400/8515/0.5/1	4400	8515	500	1	140	8	22	32.8
KOW5500/5650/0.4/1	5500	5650	400	1	74.4	7.5	22	34.6
KOW5500/10400/0.5/1	5500	10400	500	1	132.4	8.46	22	37
KOW6000/6000/0.3/1	6000	6000	300	1	88.4	15.4	22	28.4

Remark: 1. *** Internal code.

2. Customization for special specification and requirement is available.